



CAT5/CAT6 VGA + Audio Extender

...A-V goes 300 meters (1,000 feet) over CAT5 or CAT6 cable!

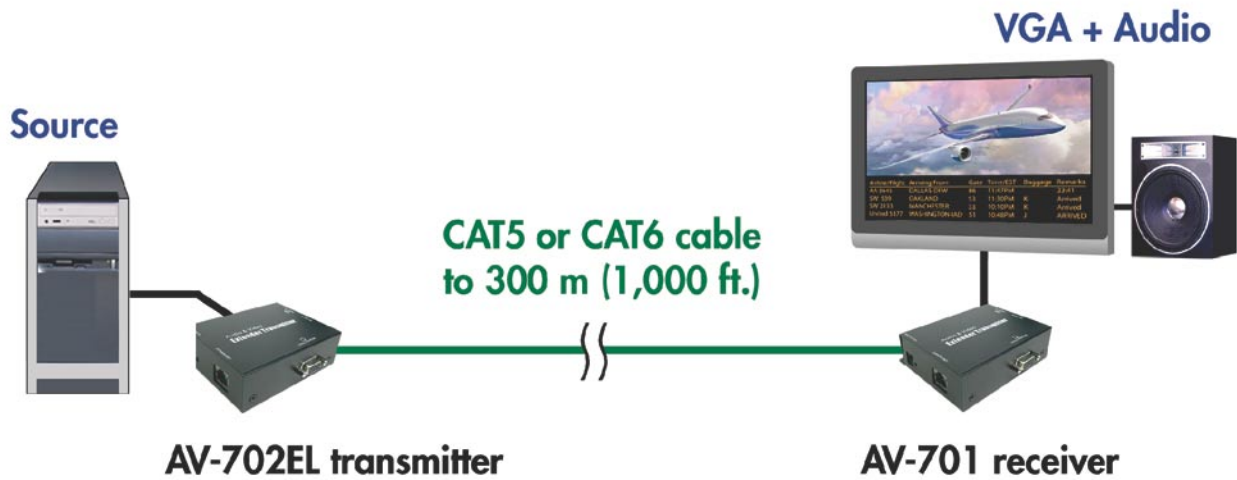

- ◇ CAT5/CAT6 cable is tidy, flexible, easy-to-use, and economical.
- ◇ Receivers have Gain, EQ, and RGB skew adjustments for optimum image quality.
- ◇ Remote monitor can be up to 300 meters (1,000 feet) from source.
- ◇ Pure hardware, Plug n Play design.
- ◇ Resolution up to 1280 x 1024 @ 75Hz.
- ◇ Supports latest TFT, LCD, SVGA, VGA, multisync with DDC2B high resolution monitors.
- ◇ **Applications:** shopping malls, public address systems, airports, train & bus stations, restaurants, stores, showrooms, boardrooms, window displays, trade shows, exhibitions, computer based training.

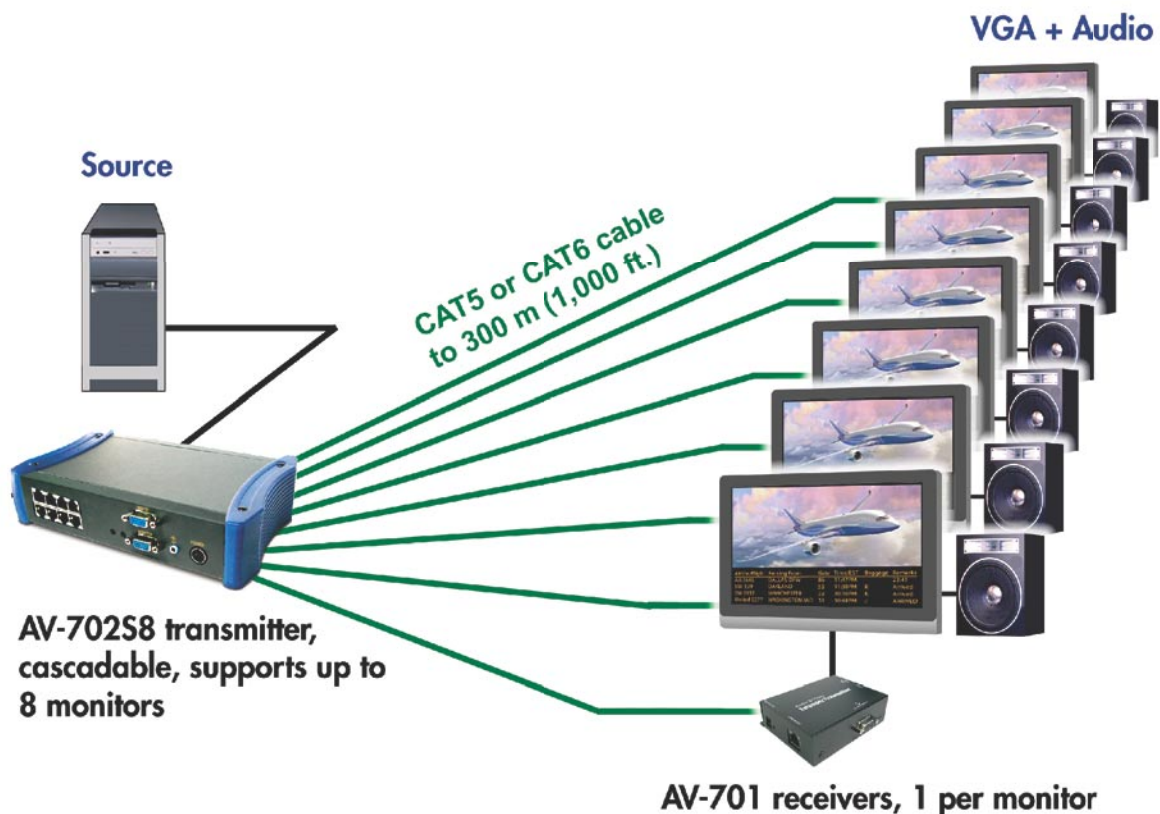








AV-701EXS
Receiver

AV-702EL
Transmitter



AV-702S4 or AV-702S8
Transmitter

Specifications

	Transmitters			Receivers	
Order No.	AV-702EL 	AV-702S4 	AV-702S8 	AV-701ES 	AV-701EXS 
System Cable	CAT5, FTP Solid Wire 2x4x24 AWG, standard 568B RJ-45 connector				
Connectors/ Controls	VGA in: HDD15F *1 VGA out: HDD15F *1 System out: RJ45 *1 Audio in: 3.5mm Jack *1 Power: Jack *1	VGA in: HDD15F *1 VGA out: HDD15F *1 System out: RJ45 *4 Audio in: 3.5mm Jack *1 Audio out: 3.5mm Jack *1 Audio gain: Mini pot *1 Power: Jack *1	VGA in: HDD15F *1 VGA out: HDD15F *1 System out: RJ45 *8 Audio in: 3.5mm Jack *1 Audio out: 3.5mm Jack *1 Audio gain: Mini pot *1 Power: Jack *1	VGA out: HDD15F *1 System in: RJ45 *1 Audio out: 3.5mm Jack *1 Video gain: Mini pot *1 Video EQ: Mini pot *1 Power: Jack *1	VGA out: HDD15F *1 System in: RJ45 *1 Audio out: 3.5mm Jack *1 Video gain: Mini pot *1 Video EQ: Mini pot *1 RGB Skew: MiniDin6F *1 Power: Jack *1
Vid. Gain/EQ	n/a			✓	✓
Vid. RGB Skew	n/a			-	✓
Cascadable	✓	✓	✓	-	-
Distance	Depends on receiver, and on cable quality. 0~300m (0~1000ft)			0~150m (0~500ft)	0~300m (0~1000ft)
Video	1280 x 1024 @ 75Hz				
Audio	mono				
Dimensions	75 x 98 x 30mm (3 x 3.9 x 1.2in.)	45(1U) x 140 x 200mm (1.8 x 5.5 x 7.9 in.)		75 x 98 x 30mm (3 x 3.9 x 1.2in.)	
Weight	240g	750g		240g	
Power	Ext. 100~240VAC > 5W ±5VDC	External 100~240VAC > 25W ±5VDC		External Ext. 100~240VAC > 5W ±5VDC	
Works with	AV-701ES, AV-701EXS			AV-702EL, AV-702S4, AV-702S8	
Operating Temperature	Up to 50°C (122°F)				
Storage Temperature	-40° ~ +70° C (-40°~158°F) non-condensing				

Ordering Information

AV-702EL	CAT5/6 Single Transmitter Module
AV-702S4	4-port CAT5/6 Transmitter Module
AV-702S8	8-port CAT5/6 Transmitter Module
AV-701ES	CAT5/6 Single Receiver Module (good to 150 m)
AV-701EXS	CAT5/6 Single Receiver Module with Video Skew Adjust (good to 300 m)
AVExt-70ES	CAT5/6 Kit, with 1 ea. AV-702EL and 1 ea. AV-701ES (good to 150 m)
AVExt-70EXS	CAT5/6 Kit, with 1 ea. AV-702EL and 1 ea. AV-701EXS (good to 300 m)