

Model No.: K30460US-15/30(USB KB/Mouse)

Single PC, Single Access KVM Extender



The Single PC, Single Access KVM Extender Kit is perfect for any type of installation where the console needs to be in a conveniently accessible location, but the computer system to reside in a long distance place away from dust, and harsh environmental influences. The K30460US-15 or K30460US-30 CAT 5 KVM Extender Kit, which effectively extends PC KVM (USB Keyboard, Video, USB Mouse) control to the Console Receiver. PS2 Mouse) control to the Console Receiver.

Features:

- ◆ Cat 5 or higher cable to connect the Transmitter and Receiver Units - up to 300M (1000 ft) apart.
- ◆ Single Console operation - control your PC from Console Receiver PS2 keyboard, Mouse and monitor.
- ◆ High resolution video -up to 1600 x 1200 @ 60 Hz.
- ◆ Supports VGA, SVGA, and Multisync monitors - Console Receiver monitor supports DDC2B.
- ◆ Console Receiver has video Gain and EQ adjustments for optimum image.
- ◆ K30460PS-30 adds RGB skew adjustment, for 300M (1000 ft) extra long cable runs.
- ◆ Pure hardware, Plug n Play design.

Specifications:

Model		K30460US-15		K30460US-30		
Unit Model		BE-601US Transmitter	BE-6304-150 Receiver	BE-601US Transmitter	BE-6304-300 Receiver	
Connectors	Console Ports	Keyboard	N/A	1 x USB Type A	N/A	1 x USB Type A
		Video	N/A	1 x HDD-15 Female	N/A	1 x HDD-15 Female
		Mouse	N/A	1 x USB Type A	N/A	1 x USB Type A
	KVM Ports		1 x HDD-15 Female	N/A	1 x HDD-15 Female	N/A
			1 x USB	N/A	1 x USB	N/A
	Power	-	1 x DC Jack	-	1 x DC Jack	
	Unit to Unit	1 x RJ45 Female		1 x RJ45 Female		
	Video Gain	N/A	1 x Mini Pot	N/A	1 x Mini Pot	
Video EQ	N/A	1 x Mini Pot	N/A	1 x Mini Pot		
LEDs	Power	1 (Green)		1 (Green)		
Emulation	Keyboard / Mouse	USB	USB	USB	USB	
Video		1600 x 1200@ 60Hz , DDC2B		1600 x 1200 @ 60Hz , DDC2B		
Distance		150M (500 ft)		300M (1000 ft)		
Video RGB Skew Adjust		N/A		YES		
Power Consumption		From USB Port 5V DC 200mA	DC 5.0V; 1.2A	From USB Port 5V DC 200mA	DC 5.0V; 1.2A	
Environment	Operating Temp.	0~70°C		0~70°C		
	Storage Temp.	-20~85°C		-20~85°C		
	Humidity	0~80% RH, Non-condensing		0~80% RH, Non-condensing		
Physical Properties	Housing	Metal		Metal		
	Weight	40 g	120 g	40 g	120 g	
	Dimensions	4.5 x 3.3 x 1.9 cm (1.78 x 1.3 x 0.75 in)	9.3 x 5.9 x 2.8 cm (3.66 x 2.32 x 1.10 in)	4.5 x 3.3 x 1.9 cm (1.78 x 1.3 x 0.75 in)	9.3 x 5.9 x 2.8 cm (3.66 x 2.32 x 1.10 in)	

Front & Back View:


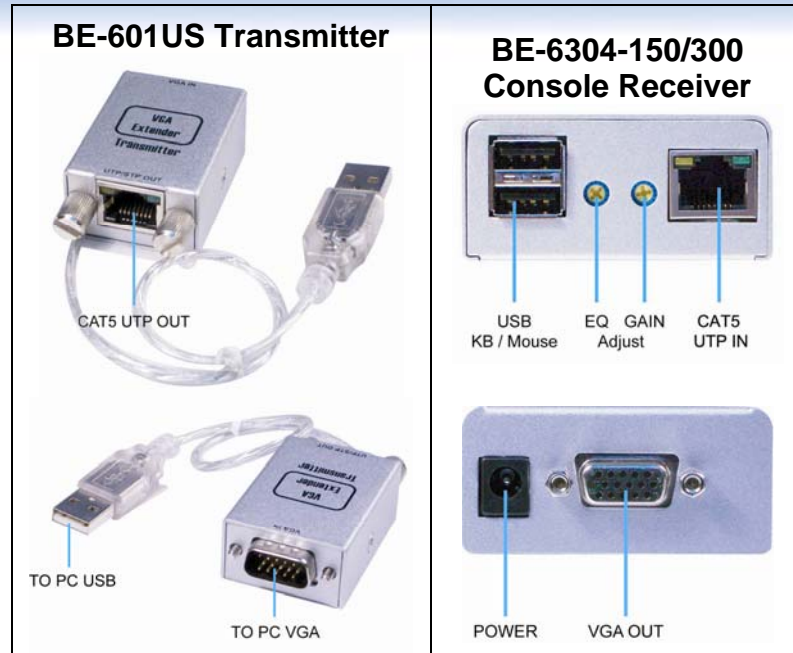


Diagram:

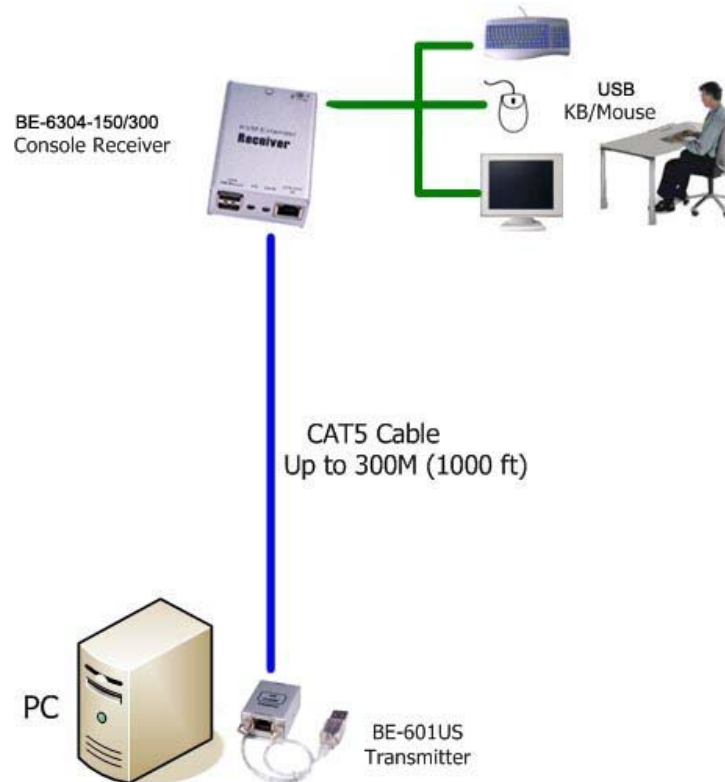

Ordering Information:

K30460US-15	Single PC, Single access KVM Extender Kit, includes 1 x BE-601US (USB Transmitter) and 1 x BE-6304-150 (USB Receiver, 150m)
K30460US-30	Single PC, Single access KVM Extender Kit, includes 1 x BE-601US (USB Transmitter) and 1 x BE-6304-300 (USB Receiver, 300m)